

HMI / Display

Wall Mount, Single Sensor



More Info

Key Features

- View real time data on the 4.3" TFT LCD touch screen
- For use with CAA Sensor's flow meters or dew point sensors
- Wall mount
- Modbus RTU input
- Optional Modbus RTU output
- IP65 protection
- Power supply: 85 ~ 264 VAC




About

Connect your CAA Sensor flow meter or dew point sensor to this HMI / display via Modbus RTU. Ideal for viewing data from sensors that (i) don't have a built-in display, or (ii) are installed in locations that are difficult to access, or (iii) are installed in remote locations.

How to Order

Find a Distributor: www.caasensors/distributors

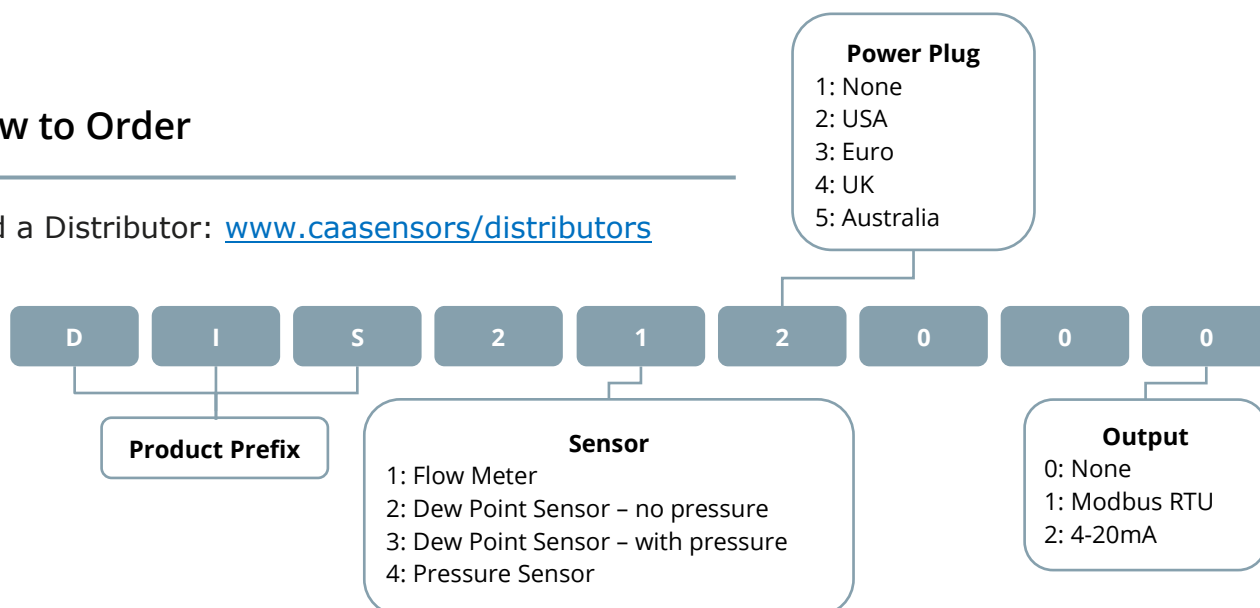

Specifications

Display	
Display	4.3" TFT LCD
Resolution	480 × 272
Inputs	
Digital	Modbus RTU
Outputs	
Digital	Modbus RTU (optional)
Power	
Power	85 ~ 264 VAC
Power Isolation	Built-in
Processor and Memory	
Memory – Flash	128 MB
Memory – RAM	128 MB
Processor	32 Bits RISC Cortex - A8 300 MHz

Working Environment	
Operating Temperature	0 to +50°C +32 to +122 °F
Storage Temperature	-20 to +60°C -4 to 140°F
Relative Humidity	0 to 95% RH
Other	
Connection	Wiring Terminal
Protection	IP65
Data Logging	No
Dimensions	265mm tall x 160mm long x 97.5mm deep 10.4" tall x 6.3" long x 3.8" deep
Installation	Wall-mounted
Materials	Engineering plastics
Warranty	12 months

Dimensions

